




Heavy-Duty Motorized Door

Bulletin #263

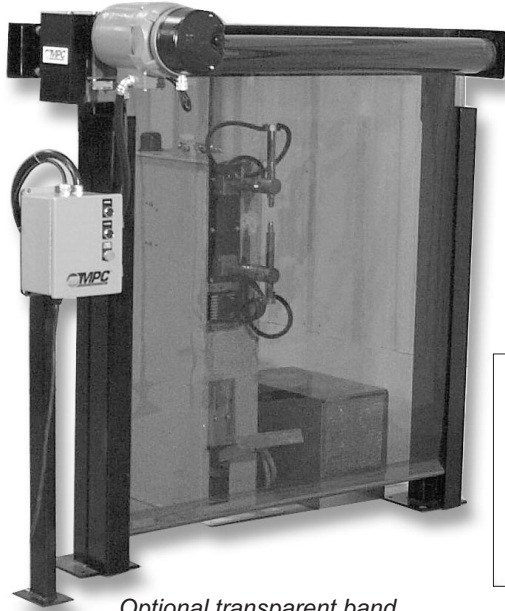

Optional transparent band shown, many fabrics available.



- Rugged frame construction
- Designed for continuous duty operation
- Reinforced safety band option
- Optional safety window provides a safe view of the work cell

Optional controller with open, close and stop push buttons.

A Heavy-Duty Motorized door system from Milwaukee Protective Covers is Ideal for automated or robotic welding cells that require fast action up/down shielding. The rugged all steel construction includes reel, frame assembly, and side guides. We can help you choose the best fire rated fabric or aluminum door material to meet your application and your budget. We use high duty-cycle drive components with easily adjustable rotary limit switches built-in.

Many options are available: see-through windows, support frames, reinforcing crossbars, resistant fabrics, all-metal doors, etc. Optional control systems can be directly integrated into your PLC controller or can feature Milwaukee Protective Covers operator push button station.

Each motorized door system uses Milwaukee Protective Covers proven designs and standard components. Each installation, however, is customized to meet your exact dimensional needs. Call for more information!

Standard Specifications

Motor:	3-phase braked motor
Gearbox:	Worm gear reducer
Speed:	2 ft/sec open and close
Limit Switch:	Rotary limit switch provided to control the open and close positions
Sizes:	Custom sizes to meet your needs. 8 FT wide maximum.
Curtain Material:	Various materials available consult MPC about your application


Options

Reinforced Rods:	Optional steel bars can provide support and obstruct access through curtain. Steel edge guides provided to support and capture curtain edges
Control Box:	Controller with open, close and stop push buttons



Quotation Request

Company Name: _____ Date: _____
 Address: _____ Contact Person: _____
 City: _____ State: _____ Phone: _____
 Zip: _____ Fax: _____

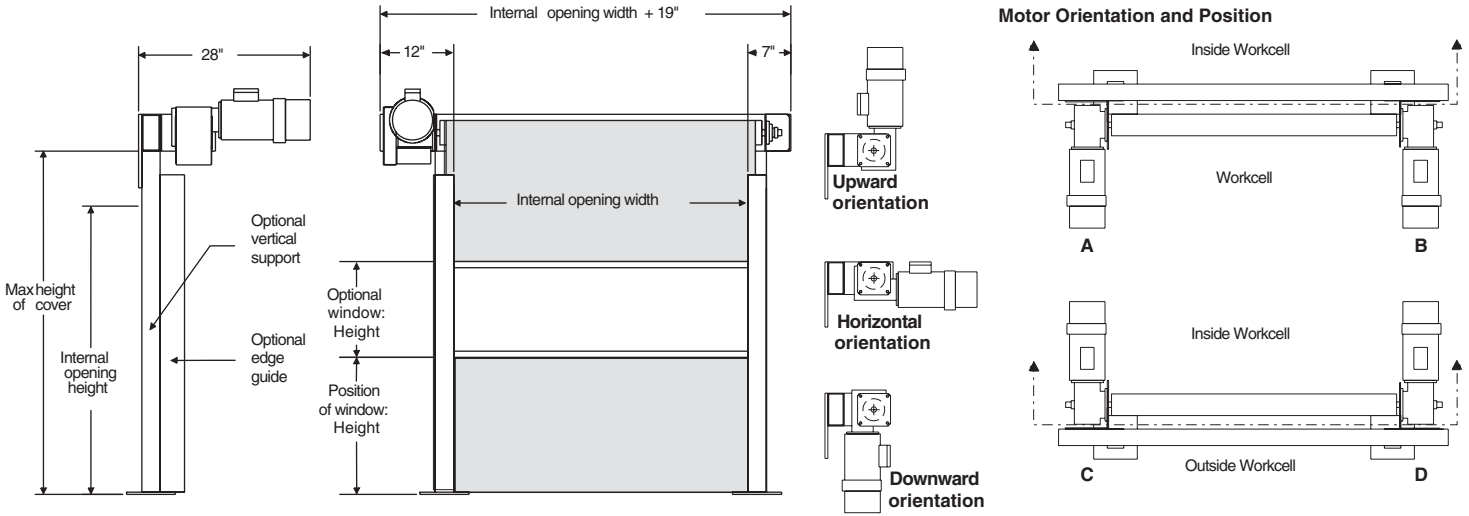

Options

- Control box
- Vertical supports
- Reinforced Curtain
- Viewport window:
 - Window fabric - WC40 40 mil Orange
 - Window fabric - WC45 80 mil Bronze
 - Standard curtain window: 24" tall centered on band
 - Custom curtain window:
 - Window height _____ (inch)
 - Position of window _____ (inch)

Order Specifications

Internal opening width: _____ (inch)
 Internal opening height: _____ (inch)

Motor Orientation

- Upward orientation
- Downward orientation
- Horizontal orientation

Motor Position

- A B C D

Band Material

Reference Bulletin #260 or consult MPC with your application today.

Special Requirements and Notes:



MPC warranty is for the value of our products only. MPC is not liable for incidental or consequential damages. Specifications are subject to change, please request approval drawings if needed. Customers must use safe design practices and install MPC products according to applicable OSHA regulations. Customer is responsible to verify all safety aspects of product usage. MPC makes no claims regarding the merchantability or fitness of use. No employee of MPC is authorized to modify this warranty. ©Copyright 2000 Milwaukee Protective Covers.

3811 N. Holton Street • Milwaukee, WI 53212 • Phone 414-906-4000 • FAX 414-906-4100 • www.MPCovers.com